

## Grey Asphalt - 330W

### High Efficiency Mono Colored PV Module

- **North American Manufacturer**


Mitrex is a world-leading manufacturer of standard solar and BIPV products based in Canada. With over 20 years of experience, Mitrex guarantees high-quality, fully-automated manufacturing and continuous innovation in solar technology.

- **Quality, Durability And Performance**

Mitrex panels are engineered with the highest quality- featuring wide-ranging compatibility with racking and electrical components, advanced cell technology, ability to withstand high snow/wind load conditions, and high performing modules.

- **25-Year Product And Performance Warranty**

Made in North America, all our products come with an industry leading 25-year warranty for products and performance, ensuring the quality of the hardware, energy generation, and aesthetics are maintained.

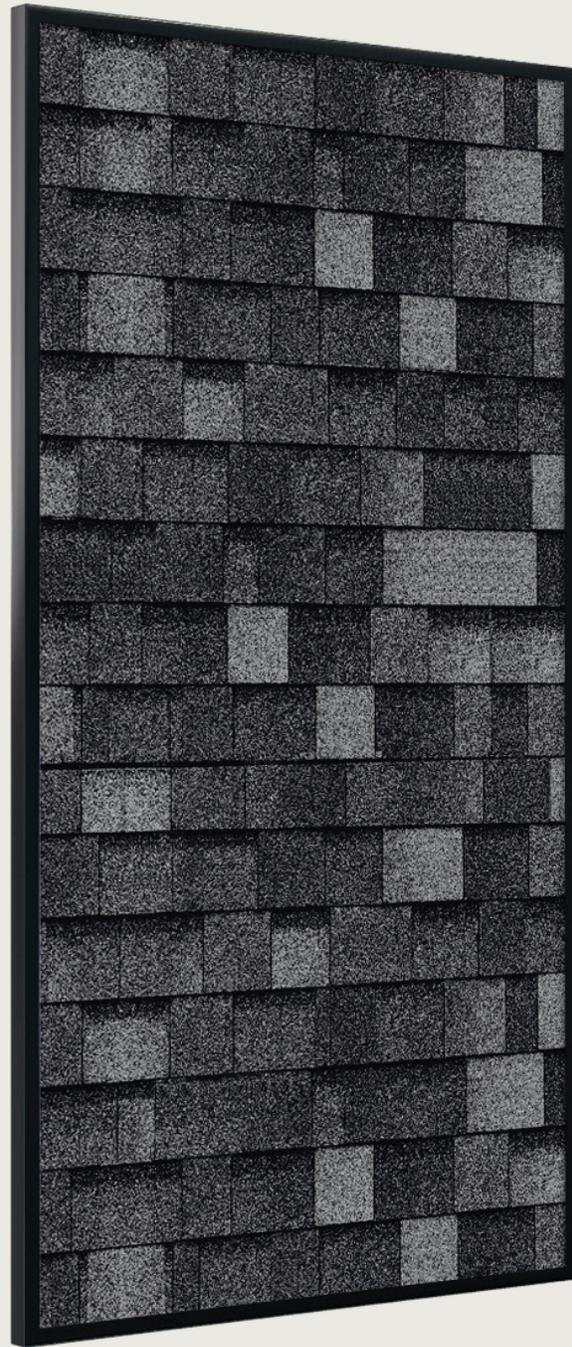


### ● Electrical Specifications

| Test Conditions                                  | STC            |
|--|----------------|
| Module Power (Pmax)                              | 330W           |
| Maximum Power Voltage (Vpmax)                    | 40.8V          |
| Maximum Power Current (Ipmax)                    | 8.09A          |
| Open Circuit Voltage (Voc)                       | 48.7V          |
| Short Circuit Current (Isc)                      | 8.55A          |
| Module Efficiency                                | 16.3%          |
| Maximum System Voltage (VDC)                     | 1000V (IEC/UL) |
| Series Fuse Rating                               | 20A            |
| Power & Other Electrical Specification Tolerance | 5%             |
| Application Classification                       | Class A        |

Measurement Conditions: STC 1000 W/m<sup>2</sup> - AM 1.5 - Temperature 25°C

### ● Engineering Drawing

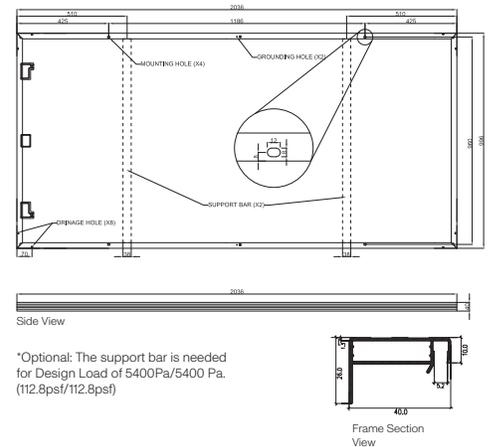


### ● Mechanical Properties

| Metric   | Imperial  |
|--|---|
| Module Weight                                      | 22 kg / 48.5 lbs  |
| Dimensions (H x L x D)                             | 2036 x 996 x 40mm / 80.2 x 39.2 x 1.6in   |
| Maximum Surface Load (Wind / Snow)                 | 5400Pa front load / 2400Pa rear load or 8000Pa front load / 8000Pa rear load*   |
| Design Load  | 3600Pa front load / 1600Pa rear load or 5400Pa front load / 5400Pa rear load*   |
| Hail Impact Resistance                             | Ø 25mm at 83 km/h / Ø 1in at 51.6 mph   |
| Cells  | 72 [12x6] Mono-crystalline (158.75 x 158.75mm) / 72 [12x6] Mono-crystalline (6.25 x 6.25in)   |
| Glass  | 3.2mm tempered glass, high transmittance, anti-reflective coating / 0.126in tempered glass, high transmittance, anti-reflective coating               |
| Cables & Connectors (Refer to Installation Manual) | 300mm, 1000mm, 1200mm - 4mm <sup>2</sup> , 12 AWG (UL) MC4 from Staubli / 11.8in, 39.4in, 47.2in - 0.16in <sup>2</sup> , 12 AWG (UL) MC4 from Staubli |
| Backsheet  | High durability, UV resistant, PV backsheet   |
| Pattern Orientation                                | Landscape & Portrait  |
| Frame  | Anodized aluminum alloy black frame   |
| Bypass Diodes                                      | 3 diodes- 30SQ045T (45V max DC blocking voltage, 30A max forward rectified current)   |
| Junction Box                                       | IP68 rated, TUV and UL certified  |
| Fire Rating  | Type II   |

### ● Temperature Ratings


|                                      |               |
|--------------------------------------|---------------|
| Temperature Coefficient Isc          | 0.032% /°C    |
| Temperature Coefficient Voc          | -0.27% /°C    |
| Temperature Coefficient Pmax         | -0.36% /°C    |
| Nominal Module Operating Temperature | 45 ± 3°C      |
| Operating Temperature                | -40°C ~ +85°C |

### ● Warranty

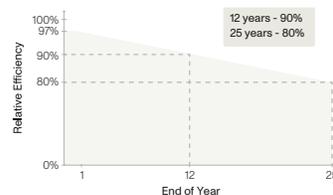

Product Material Warranty: 25 years  
 Performance Warranty: 25 years  
 ≥ 97% end of 1st year  
 ≥ 90% end of 12th year  
 ≥ 80% end of 25th year

### ● I-V Curves

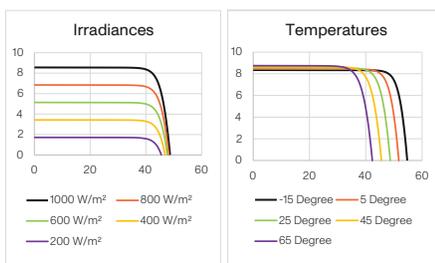

### ● Shipping

|                    |     |
|--------------------|-----|
| Modules Per Pallet | 25  |
| Pallets Per Truck  | 28  |
| Modules Per Truck  | 700 |

### ● Certifications

- UL 61730-1/-2, CSA C22.2 #61730-1/-2, IEC 61730-1/-2, UL 61215-1/-2, IEC 61215-1/-2, CSA 61215-1/-2, CEC Listed

Datasheet is subject to change without prior notice, always obtain the most recent version of the datasheet. **Caution:** For professional use only, the installation, handling, and cleaning of PV modules should only be performed by qualified professionals. Read the Installation Manual for mounting specifications before handling, installing and operating modules.